

Glass Splashbacks - Frequently Asked Questions

Q. How much do Simply Splashbacks glass splashbacks cost?

A. Simply Splashbacks glass splashbacks are priced per square metre. To obtain a price for individual glass splashback panels, please use our [Price & Buy calculator](#). For pricing on jobs with more than one splashback, or for our measure and fit service, Please [contact us](#). Freephone 08000 355614.

Q. Do you measure and fit glass splashbacks?

A. Yes, please [contact us](#) to discuss our measure and fit service. Freephone 08000 355614.

Q. Can I obtain actual samples of the coloured glass splashbacks?


A. Free glass samples are available on request. Please use our [contact page](#) to request actual glass samples.

Q. What if I want a colour different from your standard glass splashback range?

A. We can mix virtually any colour, but there will be a small charge for glass samples of our non-standard colours. To mix a bespoke colour, please send us a sample colour to match. We are also able to mix all Ral, BS, Dulux, Farrow & Ball colours.

Q. Can I have holes or cut-outs in the glass splashbacks?


A. Yes. Simply Splashbacks are specifically intended for kitchen glass splashbacks and glass shower walls, so cut-outs for sockets and holes for shower fittings are not a problem, but must be cut in our workshop prior to toughening. Once toughened, the glass cannot be cut or drilled.

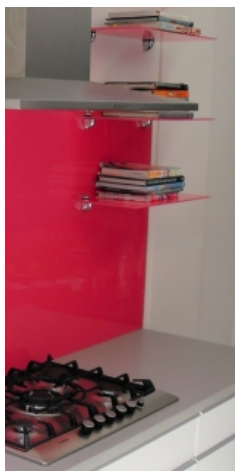

Glass Splashback Drill Holes for a Utensils Rail

Sockets

Cut-outs in glass splashbacks for electrical sockets should generally be at least 50mm from the edge of the glass

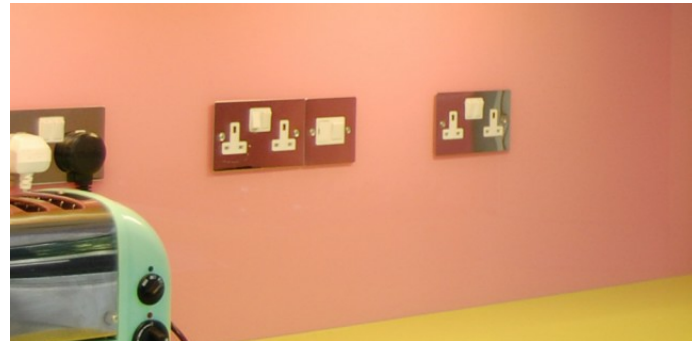

Glass Splashback Cut-outs for Electrical Sockets

Standard sizes for sockets

- Single socket 75mm x 75mm
- Double socket 135mm x 75mm

splashback or from each other. If sockets are placed side by side the boxes must be placed so that the socket covers sit tight against one another. The sockets sit on top of the glass splashback. Please ensure your electrician leaves plenty of wire so sockets can be fed through the glass splashback cut-outs.

Q. Are Simply Splashbacks glass splashbacks heat resistant?

A. Yes the glass splashbacks and splashback coating are heat resistant and will not crack behind the hob. Please see our [Toughened Glass Splashbacks Page](#) for more information.



"T" Shaped Glass Splashback Behind a Hob

Glass Splashbacks - Frequently Asked Questions



Extractor Fan Fitted to Curved Glass Panel

You may fit your extractor fan to the top of a curved or flat glass splashback.

Q. Do you measure and fit glass splashbacks?

A. Yes, please contact us to discuss our measure and fit service. Freephone 08000 355614.

Q. Can I obtain actual samples of the coloured glass splashbacks?

A. Free glass samples are available on request. Please use our contact page to request actual glass samples.

Q. What if I want a colour different from your standard glass splashback range?

A. We can mix virtually any colour, but there will be a small charge for glass samples of our non-standard colours. To mix a bespoke colour, please send us a sample colour to match. We are also able to mix all Ral, BS, Dulux, Farrow & Ball colours.

Q. How thick are Simply Splashbacks glass splashbacks?

A. Simply Splashbacks glass splashbacks are made as standard from 6mm toughened glass. However, Simply Splashbacks glass splashbacks are also available in 8mm, 10mm, 12mm, 15mm and 19mm thicknesses. These thicknesses are often used for glass shelves, glass tabletops, glass vanity tops and glass worktops.

Q. Can I fit Simply Splashbacks glass splashbacks myself?

A. Fitting a single glass splashback panel is easy, and we would recommend you do this yourself, with the silicone glue that we provide. However, when several glass splashbacks need to be measured to fit together this is much more difficult. Unless you are an extremely competent DIYer, we would recommend that you employ a professional to measure and fit, or take advantage of our fitting service, when more than one glass splashback panel is required.

If you are measuring yourself, we suggest you go to the trouble of making glass splashback templates from 8mm MDF. If the MDF templates fit, the glass splashbacks will fit. From our own experience, we know that there are many pitfalls! Please see our [Measure & Fit page](#) for further information.

Q. Does the wall need to be flat and in good condition?

A. The wall needs to be free of bows, twists or raised areas over approximately 2-3mm. Any sharp areas need to be sanded. Unevenness less than that depth can be taken up by the adhesive. All walls must be sealed using either PVA or emulsion paint.

The walls will be obscured by Simply Splashbacks glass splashbacks, so the surface does not need to look pretty.

Wiring must be chased into walls and any light fittings should be fitted, allowing at least 10mm for the thickness of the glass splashbacks.

Q. Can I fit Simply Splashbacks glass splashbacks on top of my existing tiles?

A. We do not recommend this.

Q. How are the glass splashback edges finished?

A. All external glass splashback edges are polished.

Easy Glass Splashbacks – Our service is second to none



Links to all Easy Glass Splashbacks pdf files

All Easy Glass Splashbacks pdf files in one document
Bathroom Glass Splashbacks & Coloured Glass Shower Walls
Coloured & Printed Glass Splashbacks & Glass Walls
Glass Splashbacks Measure & Fit Service
Glass Splashback Abstract Pictures
Glass Splashback Colours Choice
Glass Splashback Flower Pictures
Glass Splashback Food Pictures
Glass Splashback Fish Pictures

Glass Splashback Landscape Pictures
Glass Splashback Wallpaper Pictures
Kitchen Glass Splashbacks
Printed & Coloured Glass Splashbacks FAQ
Printed Glass Splashbacks
Easy Glass Splashbacks Terms & Conditions
Easy Glass Splashbacks Testimonials
Toughened Glass Splashbacks & Glass Wall Panels